



# PT790 Ex

Intrinsically safe TETRA handheld radio

The PT790 Ex is the first TETRA handheld radio worldwide with the highest level of intrinsic safety "ia". Its robust design and its safety functions substantially increase the industrial safety of users in the oil and gas industry, mining industry or fire departments.



# Radio

## PT790 Ex

TETRA handheld radio (ATEX)



For many experts two-way radios represent an indispensable tool in their day-to-day work. For those working in environments containing explosive gases, combustible dust, or in the mining industry, safety is of particular importance.

The intrinsically safe handheld radio PT790 Ex offers first-class protection for users who are dependent on reliable TETRA radio in such areas exposed to explosions and fire hazards. As the first TETRA radio with the "ia" approval worldwide, the PT790 Ex meets the highest requirements that can be imposed on an intrinsically safe product.

### Highlights

#### Maximum safety

As the first TETRA handheld radio throughout the world with "ia" approval, the PT790 Ex can be used in areas in which an explosive atmosphere containing a mix of air and combustible gases, vapors or mists are permanently present (Zone 0).

#### Robust & reliable

The PT790 Ex offers excellent features even under harsh operating conditions. The device is dust-proof and waterproof in accordance with IP67 degree of protection, withstanding submersion in 1 meter of water for a duration of up to 30 minutes. Furthermore, the PT790 Ex meets the requirements of the US MIL-STD-810 F/G standard.

#### Functions for industrial safety

To offer the maximum possible industrial safety, the PT790 Ex features a man down alarm sensor and an adjustable time alarm (lone worker). The standard equipment GNSS module receives positioning data via GPS, GLONASS and Beidou and can transfer these data for further analysis to the control room or an AVL dispatcher

#### Immediate and direct TETRA communication

PT790 Ex provides rapid access to the TETRA radio network and to its services. It meets the regulations of the ETSI TETRA standard and is therefore compatible with infrastructures and terminals from various manufacturers.

#### Versatile functions

Besides voice and data communication, the PT790 Ex offers many additional functions: Encryption, programmable keys, etc. Moreover, the handheld radio includes a connection for expansions and accessories.

The features marked with \* are available in future versions of the PT790 Ex. Encryption features are optional and have to be configured separately. They are also subject to German and European export regulations.





Intelligent antenna design: Separate rotary buttons ensure a simple operation

Clearly arranged, multilingual menu

Ergonomic and lightweight chassis

20 programmable buttons

#### High-strength LCD protective cover

The high-strength LCD protective cover is extremely scratch-resistant and would even withstand being struck by a 1-kg hammer.

#### Innovative battery latch

The patented lock of the battery ensures that the battery cannot fall out if the radio should be dropped onto a hard surface.

#### Visible "ia" certification

The green frame of the display indicates that this is an "ia"-certified handheld radio.

#### Countersunk screws

To minimize the possibility of a discharge at the belt clip, the screws for fastening the belt clip are countersunk. If the radio should ever be dropped, the screws will not touch the ground.

#### Anti-slip design

The rear part of the battery and both sides of the chassis are equipped with an anti-slip material to prevent the radio from slipping and falling down and to ensure a solid grip.

#### Innovative silicone encapsulation

To protect the internal circuits of the PT790 Ex against liquids, dust and gases, they are encapsulated with silicone.



**Device group:**  
 I: Mining  
 II: Other areas with potentially explosive atmospheres (no mining, chemical industry, oil refinery, etc.)




**Explosion protection standard:**  
 EU ATEX explosion protection directive and IECEx standard



**Gas groups:**  
 I: Methane  
 IIA: Propane  
 IIB: Ethylene  
 IIC: Hydrogen

# GAS

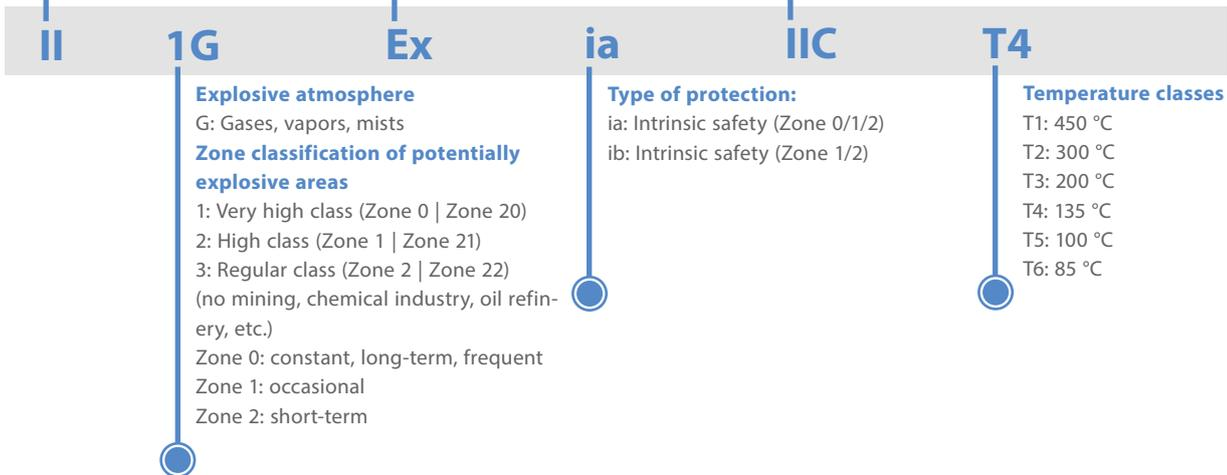

**Device group:**  
 I: Mining  
 II: Other areas with potentially explosive atmospheres (no mining, chemical industry, oil refinery, etc.)



**Explosion protection standard:**  
 EU-ATEX explosion protection directive and IECEx-standard




**Gas groups:**  
 I: Methane  
 IIA: Propane  
 IIB: Ethylene  
 IIC: Hydrogen

# DUST



**Dust and water protection class**

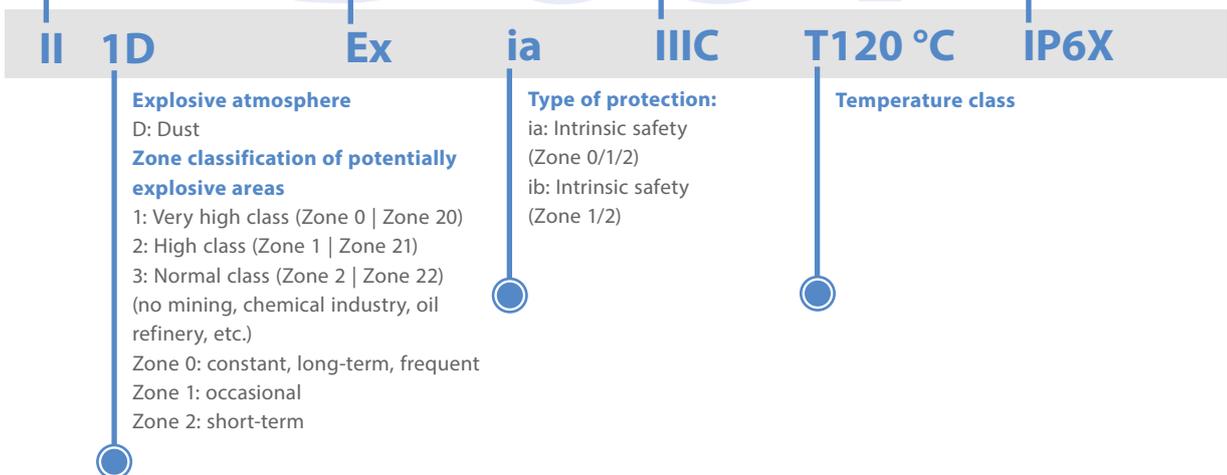



#### Device group:

I: Mining  
II: Other areas with potentially explosive atmospheres (no mining, chemical industry, oil refinery, etc.)

#### Explosion protection standard:

EU-ATEX explosion protection directive and IECEx-standard

I

M1

Ex

ia

#### Category of device group I:

M1: Very high level of safety. Products remain safe even if two independent faults occur. Continued operation must be ensured.  
M2: High level of safety. Products are intended to be de-energized in the event of an explosive atmosphere.

#### Type of protection:

ia: Intrinsic safety (Zone 0/1/2)  
ib: Intrinsic safety (Zone 1/2)

## Safety on the highest level

Whether on an oil drilling platform, in mining or other potentially high-explosive environments, safe and reliable communication always comes first. With the world's first "ia"-certified TETRA handheld radio, Hytera offers its customers a device that meets this extremely safe requirement profile.

### "ia"

The operating resources employed in the potentially explosive area contain only intrinsically safe circuits. A circuit is considered intrinsically safe if no spark and no thermal effect that occur under defined testing conditions, can cause the ignition of a specific explosive atmosphere.

### Device groups

The device groups are divided into two different areas (I and II). Group I is designated for devices that are being used in mining operations. Group II applies to all areas that could be subject to a potentially explosive atmosphere. Both device groups are again divided into individual categories that define the scope of protection and application area of the devices.

### Zone classification

The zone classification of potentially explosive areas is divided into Zone 0, 1, 2 for gases and 20, 21, 22 for dust. In this context, the zones differ by how often and how long dangerous explosive materials occur. Distinctions are made between: "constant, over long periods of time or frequent" (0|20), "occasional" (1|21) and "none or short-term" (2|22).



## Functions

The PT790 Ex handheld radio was developed in compliance with the open TETRA standard of the European Telecommunications Standards Institute (ETSI).

### Operating mode

- Trunked radio mode (TMO): Communication via the TETRA radio network (semi-duplex and duplex mode)
- Direct mode (DMO): Direct communication between the radios (semi-duplex)

### Voice services

#### Group calls

- Group call with defined priority (incl. pre-emptive priority)
- Dynamic Group Number Assignment (DGNA)
- Broadcast call (group, TMO)
- Talking party indication (TPI)
- Late Entry
- Open group call
- Group scan with priorities

#### Individual call

- Individual call half-duplex and individual call duplex (TMO)
- Individual call with defined priority (also pre-emptive priority)
- Calling Line Identification Presentation (CLIP)

#### Emergency call

- Emergency call to selected or pre-defined group
- Emergency call as individual call and as call to a telephone network (PSTN/PABX)
- Emergency call microphone & cyclic change of permission to talk during the emergency call
- Silent alarm (TMO)

#### Calls to telephone networks (PSTN/PABX) (TMO)

- PSTN/PABX individual call, full-duplex
- PSTN/PABX individual call, half-duplex
- DTMF
- Calling Line Identification Presentation (CLIP)

### Additional call services

- Callout
- Gateway call (DMO) / repeater call (DMO)

### Security services

- Authentication (by system and mutual)
- Air interface encryption (TEA1, TEA2\*, TEA3, TEA4)
- End-to-end encryption (E2EE) by software (AES128 / AES256), by SIM card, encryption of voice and SDS
- Access control with PIN/PUK code
- TETRA security class 1, 2, 3: non-encrypted, static encryption (SCK), dynamic encryption (CCK/DCK)
- Key distribution via air interface (OTAR)
- Static encryption in the DMO mode (SCK)
- Attachment/deactivation via air interface (Enable/Disable)
- Ambience Listening

### Security functions for the user

- Emergency button
- Lone worker function /man-down alarm
- Tilt alarm
- Silent alarm
- Call barring
- Programmable key lock (individual keys can be excluded from the lock)
- Configuration protection / configuration password
- TX Inhibit (TXI)

### Data / message services


- Short data service (SDS) – types 1, 2, 3, 4 and TL
- Concatenated SDS (Long SDS) and Flash SDS
- Status message/text message
- Notification of new messages during a call
- Packet data service (packet data, single-slot, multi-slot)
- Java™ platform MIDP 2.0, WAP



### Functions of the user interface

- 20 programmable keys for direct access to the individual Functions (shortcut keys)
- 4-ways navigation key
- Separate rotary switches for call groups and audio volume
- Call log: Missed/answered calls, dialed numbers
- Flexible dialing (e.g. direct dialing, redialing, dialing lists etc.)
- Special microphone
  - upper microphone for half-duplex calls
  - lower microphone for duplex calls
- Adjustable screen brightness & screensaver
- Many international languages are already available, installation of several selectable languages on radio
- Positioning according to ETSI LIP or NMEA protocol
  - Completely integrated GPS/GLONASS/Beidou receiver
  - Completely programmable position updating
  - Display of direction and position of the other call parties
  - Transmission of the position data on emergency call
- Integrated BT
  - Wireless BT connection to different audio and PTT devices
  - Automatic search and detection of compatible BT devices
- PEI interface
- Clock synchronization via GPS/SAT, radio network or local time
- Energy saving mode
- Automatic cell re-selection without call interruption (handover)
- Programming several selectable network identifications (TMO, DMO)
- Programming several selectable PSTN/PABX gateways
- Customizable alarm tones
- Radio User Assignment (RUA)
- Over The Air Interface (OTAP)

### Standard accessories

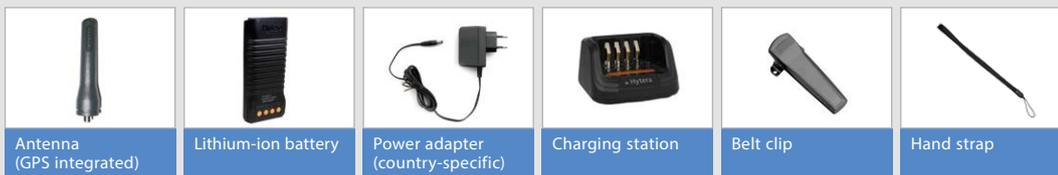

### Optional accessories (excerpt)



## Technical Data

General data	
Frequency ranges	380 – 430 MHz / 806 – 870 MHz
Dimensions (H x W x D)	141 x 55 x 39 mm
Weight	approx. 515 g (with 1800 mAh battery and antenna)
Operating voltage	7.4 V
Battery (lithium-ion)	1800 mAh (standard battery)
Battery service life (5-5-90 duty cycle)	Approx. 14 hours (standard battery)
Maximum audio power output	> 1,2 W

User interface	
LCD color display	1.8 inch, 160 x 128 pixel, 65,536 colors
Call groups – TMO	3000
Call groups – DMO	2000
Phone book	1000 entries
Group lists – TMO (use for scanning, scan lists)	200 (200 groups per list)
Group lists – DMO	50 (200 groups per list)
Number of short messages (SDS) (inbox, sent, drafts)	400 / 50 / 50
Number of status messages	200

Environmental conditions	
Operating temperature range (in non-hazardous environment)	-30 °C to +60 °C
Operating temperature range (in hazardous environment)	-20 °C to +55 °C
Storage temperature range	-40 °C to +85 °C
Relative humidity	ETS 300 019 (95%)
Protection against dust and moisture	IEC60529, IP67
Shock and vibration resistance	MIL-STD-810 F/G
Explosion protection	Gas: II 1G Ex ia IIC T4 Dust: II 1D Ex ia IIIC T120 °C IP6x Mine: I M1 Ex ia

Radio characteristics	
Channel spacing	25 kHz
Transmitting power	1 W
RF power control	± 2 dB
Receiver class	ETSI EN 392-2 / 396-2 class A
Static receiver sensitivity	-112 dBm (typical -116 dBm)
Dynamic receiver sensitivity	-103 dBm (typical -105 dBm)

GNSS (GPS / GLONASS / Beidou)	
Receiving sensitivity	≤ -144 dBm
Signal tracking sensitivity	≤ -157 dBm
Precision	≤ 10 m
Time to first position recognition (TTFF) cold start	< 50 seconds
Time to first position recognition (TTFF) warm start	< 1 second

All technical information was determined at the factory and in accordance with the corresponding standards. Subject to change on the basis of continuous development.

The illustrations below are solely for reference.  
The products themselves may deviate from these representations.

Your Hytera partner:



### Hytera Mobilfunk GmbH

**Address:** Fritz-Hahne-Straße 7, 31848 Bad Münder, Germany  
**Tel.:** +49 (0)5042 / 998-0 **Fax:** +49 (0)5042 / 998-105  
**E-mail:** info@hytera.de | [www.hytera-mobilfunk.com](http://www.hytera-mobilfunk.com)

Further information can be found at:

[www.hytera-mobilfunk.com](http://www.hytera-mobilfunk.com)

Contact us if you are interested in  
 purchasing, sales or  
 application partnerships: [✉ info@hytera.de](mailto:info@hytera.de)



Hytera Mobilfunk GmbH reserves the right to modify the product design and the specifications. In case of a printing error, Hytera Mobilfunk GmbH does not accept any liability. All specifications are subject to change without notice.

Encryption features are optional and have to be configured separately; they are also subject to German and European export regulations.

**HYT** Hytera are registered trademarks of Hytera Co. Ltd.  
 ACCESSNET® and all derivatives are protected trademarks of Hytera Mobilfunk GmbH. © 2016 Hytera Mobilfunk GmbH. All rights reserved.